


GP200

PE swing door – Options



With stainless steel frame for insulating panels (customized)

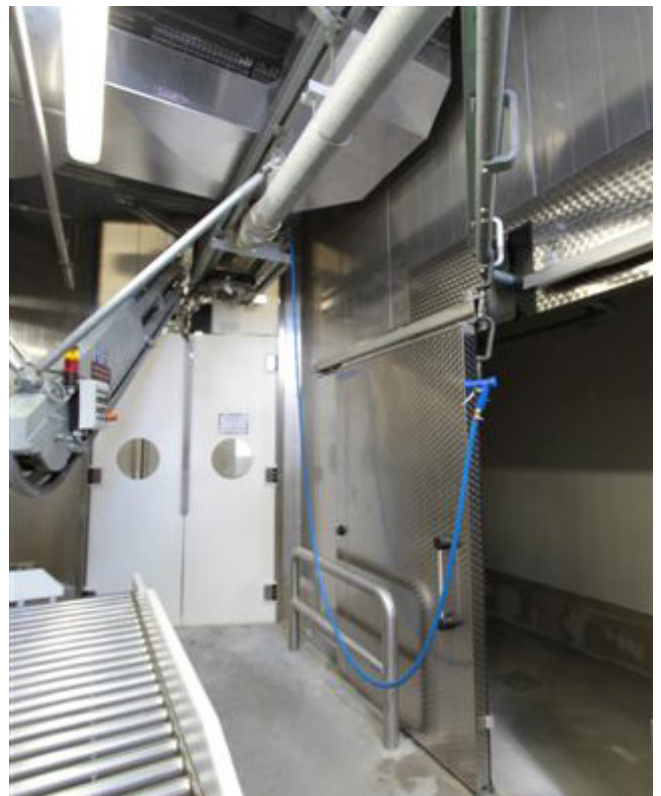

Door system with opening used for overhead conveyor




PE bumper above window and PVC finger protection



Between changing rooms and production area including stainless steel frame



With full gasketing on top, bottom and in the middle

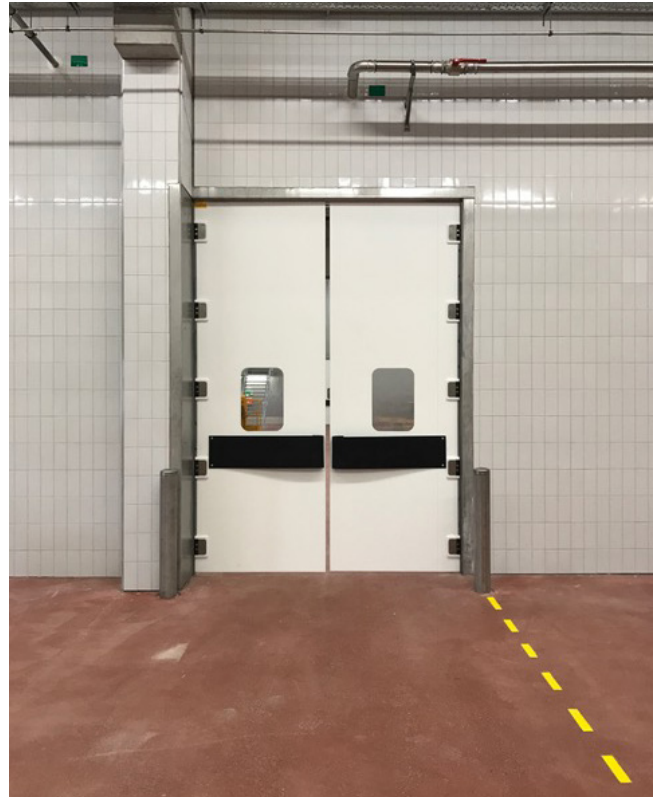

Dimension 2500 mm x 3500 mm



In combination with sliding door in cold storage facility



Gate system of two large traffic doors 1600 mm x 5600 mm



PE bumper and spring bumper



PE bumper, spring bumper and finger protection



Doors with stainless steel frames for insulating panels and impact panels



PE teardrop bumper 1200 mm high



Stainless steel lock and PE lock protection



In workshop with stainless steel frame, handle, PE bumper and finger protection



PVC finger protection starting from 900 mm



In cold storage with stainless steel flat frame riveting on existing frame



GP360 PE swing door with PE bumper, teardrop bumper and square window 600 x 600 mm



GP360 with 2 x 180° extra-large opening angle and 90° stop on request